

CMFP4532-SERIES




Applications

- DC/DC Converter
- Power supply systems
- Various electronic devices
- DC low voltage power lines
- Multimedia devices
- Safety applications, etc.


Environmental data

- Operating temperature range : -40°C ~ +125°C(component)
- Storage conditions (packaged) : -25°C ~ +40°C, ≤75% RH
- Complies with AEC-Q200 standard


Dimensions [Unit : mm]

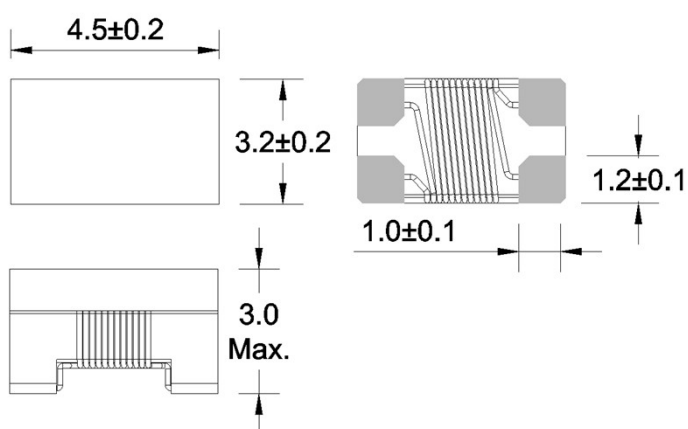

Picture

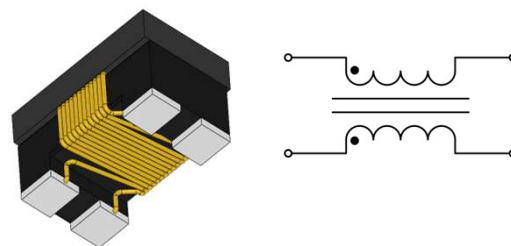

Land Pattern [Unit : mm]

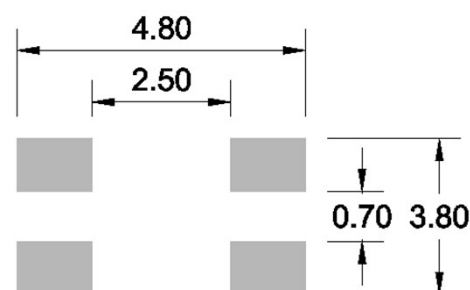

Specifications

Part No.	Common mode impedance(Ω) 100MHz	DCR (m Ω)	Heating Rating Current DC(A) a)	Insulation resistance (M Ω)	Rated voltage (Vdc)
		MAX.	MAX.	MIN.	MAX.
CMFP4532-800	80 $\pm$ 25%	50	3	10	50
CMFP4532-900	90 $\pm$ 25%	50	3	10	50
CMFP4532-121	120 $\pm$ 25%	50	3	10	50
CMFP4532-201	200 $\pm$ 25%	100	1.5	10	50
CMFP4532-601	600 $\pm$ 25%	240	1.5	10	50
CMFP4532-801	800 $\pm$ 25%	240	1	10	50

Notes

* All test data is referenced to 25 °C ambient

a) DC current (A) that will cause an approximate ΔT of 40 °C

CMFP4532-SERIES

■ Performance Graph

— Differential Mode
— Common Mode

